



# Packaging Machine Product Lines

## Case Erectors

### Model 1600 Case Erector

**Case speeds:**

17 cases per minute  
(depending on case size)

**Case size capacity:**

Min: (LxWxH)-14"x7"x6"  
Max:(LxWxH)-25"x14"x19"

**Case Styles Supported:**

RSC, HSC,  
(others styles, if samples are provided)

**Options:**

Lidder Attachment (this can also be added later)



### Model 1800 Case Erector (shown with Lidder)

**Case speeds:**

20 cases per minute  
(depending on case size)

**Case size capacity:**

Min: (LxWxH)-14"x7"x6"  
Max:(LxWxH)-25"x14"x19"

**Case Styles Supported:**

RSC, HSC,  
(other styles, if samples are provided)

**Options:**

Lidder Attachment (this can also be added later)



## SIMS MFG. CO., INC.

134 North First Avenue

P.O.Box 2568

Yakima, WA 98902

Ph:509.453.7690

Fx:509.457.8606

www.simsmfg.com

sales@simsmfg.com

## Case Sealers (Uniform)

### Model T-400 Entry Level Uniform Case Tape Sealer

**Case Speeds:**

Up to 30 cases per minute

**Case Size Capacity:**

Minimum LxWxH - 8" x 8" x 4"  
Maximum LxWxH - 18" x 16" x 14"

**Machine Dimensions:** 94" long x 47" wide x 75" high


**Motor** 3/4 HP

**Conveyor Height:** Minimum 24" Maxium 33"

**Belt Speed:** 114 feet per minute (higher belt speeds available)

**Air Requirments:** 3.0 C.F.M

**Tape Head:** Sims Patented Tape Head 2" standard (3" optional)



### Model T-500 Industrial Uniform Case Tape Sealer

**Case Speeds:**

Up to 30 cases per minute

**Case Size Capacity:**

Minimum LxWxH - 8" x 8" x 4"  
Maximum LxWxH - 18" x 16" x 14"

**Machine Dimensions:**

94" long x 47" wide x 75" high

**Motor**

3/4 HP

**Conveyor Height:**

Minimum 24" Maxium 33"

**Belt Speed:**


114 feet per minute  
(higher belt speeds available)

**Air Requirments:**

3.0 C.F.M

**Tape Head:**

Sims Patented Tape Head 2" standard  
(3" optional)



### Model T-600 Industrial Uniform Case Tape Sealer

**Case Speeds:**

Up to 20 to 25 cases per minute

**Case Size Capacity:**

Minimum LxWxH - 14" x 11" x 6"  
Maximum LxWxH - 22" x 16" x 14"

**Machine Dimensions:**

80" long x 42" wide x 72" high

**Motor**

3/4 HP

**Conveyor Height:**

Minimum 26" Maxium 32"

**Belt Speed:**

125 feet per minute  
(higher belt speeds available)

**Air Requirments:**

7.0 C.F.M

**Tape Head:**

Sims Patented Tape Head 2" standard  
(3" optional)



# Case Sealers (Random)

## Model T-660 Industrial Random Case Sealer

### Case Speeds:

20 to 25 cases per minute

### Case Size Capacity:

Minimum LxWxH – 14" x 11" x 6"

Maximum LxWxH – 22" x 16" x 15"

### Machine Dimensions:

80" long x 42" wide x 72" high

### Motor

3/4 HP

### Conveyor Height:

Minimum 26" Maximum 32"

### Belt Speed:


125 feet per minute  
(higher belt speeds available)

### Air Requirements:

7.0 C.F.M

### Tape Head:

Sims Patented Tape Head 2" standard  
(3" optional)



## Model T-750 Industrial Random Case Sealer

### Case Speeds:

Up to 15 cases per minute

### Case Size Capacity:

Minimum LxWxH – 8" x 8" x 4"

Maximum LxWxH – 25" x 22" x 20"

### Machine Dimensions:

80" long x 48" wide x 72" high

### Motor

3/4 HP

### Conveyor Height:

Minimum 24" Maximum 32"

### Belt Speed:

115 feet per minute  
(higher belt speeds available)

### Air Requirements:

7.0 C.F.M

### Tape Head:

Sims Patented Tape Head 2" standard  
(3" optional)



## Model G-950 Industrial Random Case Sealer

### Case Speeds:

Up to 15 cases per minute

### Case Size Capacity:

Minimum LxWxH – 14" x 11" x 4"

Maximum LxWxH – 22" x 16" x 15"

### Machine Dimensions:

100" long x 48" wide x 76" high

### Motor

1.0 HP

### Conveyor Height:

Minimum 26" Maximum 32"

### Belt Speed:

120 feet per minute  
(higher belt speeds available)

### Air Requirements:

7.0 C.F.M

### Tape Head:

Sims Patented Tape Head 2" standard  
(3" optional)



# Sims High Speed & High Performance Tape Heads

## Sims High Speed Tape Heads

The Sims patented tape head is Fast, Flexible, Reliable and Very Durable. It is one of the reasons why Sims' case sealers are in a class by themselves.

### Speeds:


Sims Tape Heads will work with conveyor speeds of up to 160 feet per min.

### Construction:

Heavy Duty Aluminum Frame, Durable Nylon Rollers and Stainless Steel Shafts and Screws

### Features:

Adjustable Flag Length. Easy to thread and load. Fewer Moving Parts. Low Maintenance.

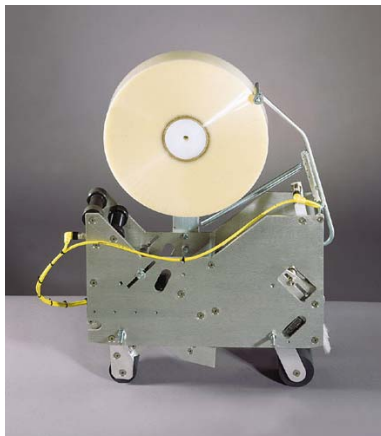

**SIMS MFG. CO., INC.**

Ph:509.453.7690

Fx:509.457.8606

[www.simsmfg.com](http://www.simsmfg.com)

[sales@simsmfg.com](mailto:sales@simsmfg.com)

